

Fig. 1

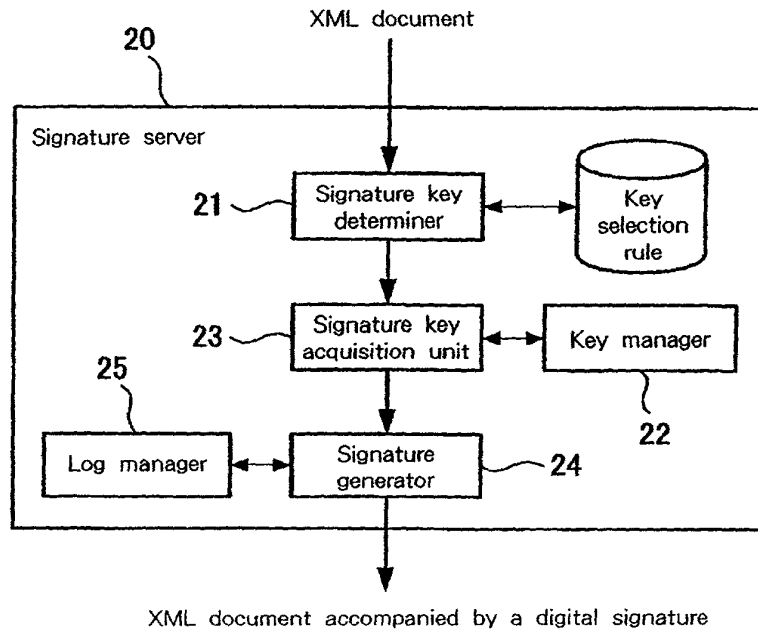


Fig. 2

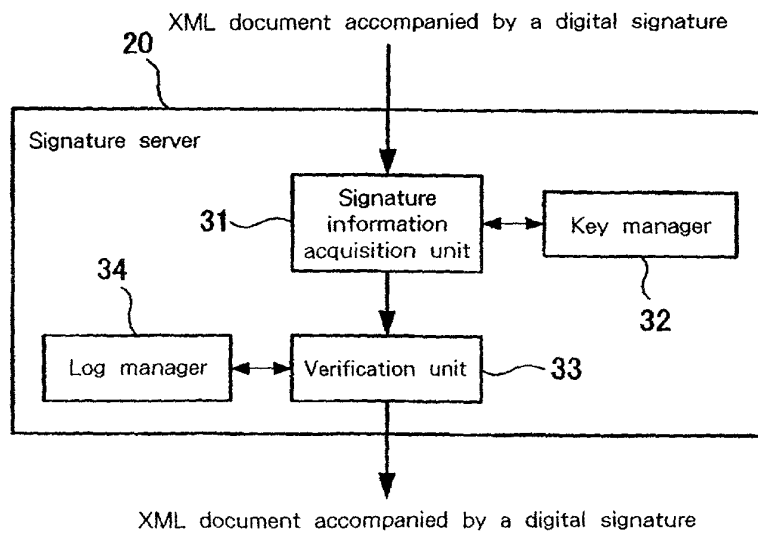


Fig. 3

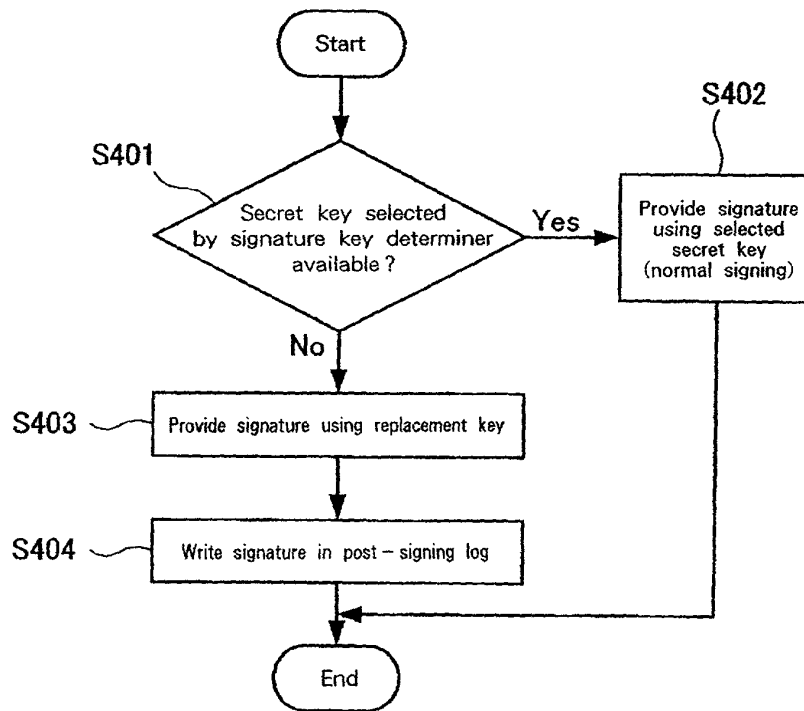


Fig. 4

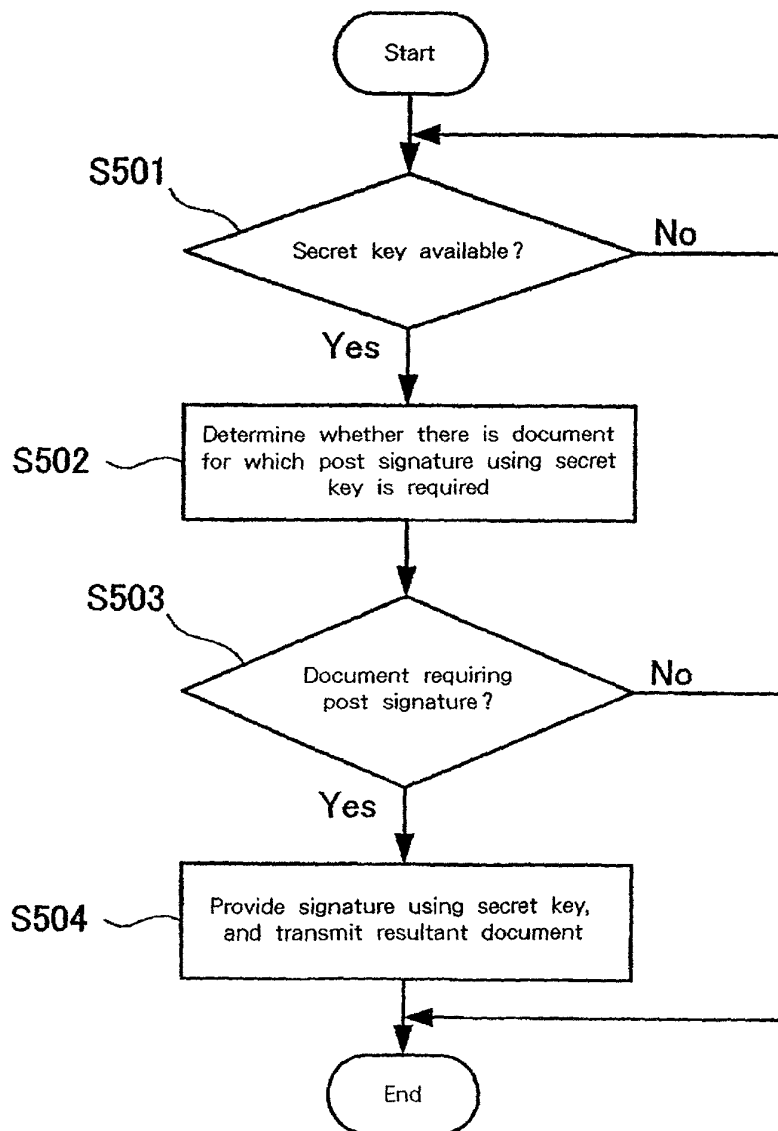


Fig. 5

```
<rule>

<!-- when the root element is purchaseOrder and the level attribute is 'A' (equal to or greater than one million yen), use the key of a company --->
<description about="//purchaseOrder[@level='A']">
  <key ID="SigningKeyForCompany">
    <!-- upon arrival, send mail for confirmation -->
    <whenArrived>
      <confirm mail="staff@jp.ibm.com">
        </whenArrived>
      </description>
    <!-- when the root element is purchaseOrder and the level attribute is 'B' (equal to or greater than 100,000 yen), use the key of the person in charge --->
    <description about="//purchaseOrder[@level='B']">
      <key ID="SigningKeyForManager">
        </description>
      ...
    </rule>
```

Fig. 6